




<b>Technical Data Sheet:</b>	<b>DS289/1111</b>
<b>Product Description</b>	<b>Standard weight nylon (flame retardant PA6) double slit corrugated pliable conduit</b>
<b>Product Range</b>	<b>FPADS - Double slit Non-Metallic Conduit</b>

Roman Way, Coleshill  
Birmingham  
B46 1HG, United Kingdom  
Tel: 00 44 (0)1675 466900  
Website: www.flexicon.uk.com

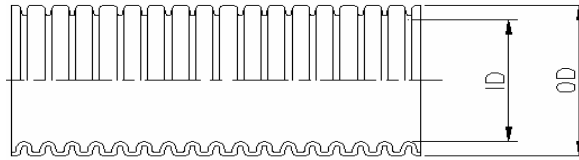

Conduit complete with FPA fitting

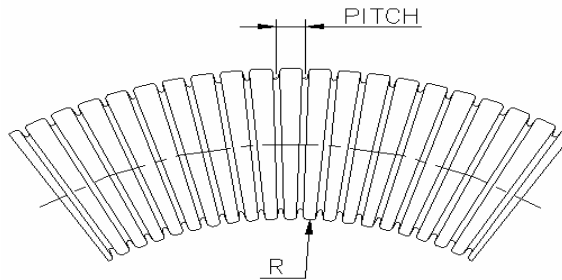

**Material:**  
Nylon PA6 (flame retardant)

**Colour:**  
Black

**Fire Performance:**  
Flame retardant, halogen, sulphur and phosphorous free

**IP Rating:**

• IP40

**Applications:**  
Ideal for use in retrofit applications where cables have already been installed. Cables can be inserted laterally thus reducing the need to draw the wires through the conduit.

**Compression Strength:**  
60kg/100mm (21mm)

**Pull-off (Tensile) strength :**  
15kg (21mm)

**Temperature Performance:**

-40°C to +110°C

Nominal Size	Part No	Dimensions			
		Reel Length (M)	OD (mm)	ID (mm)	Min Bend radius R (mm)
11	FPADS11B	50	11.5	6.2	70
13	FPADS13B	50	13	7.9	75
16	FPADS16B	50	15.8	10.3	100
21	FPADS21B	50	21.2	13.9	120
28	FPADS28B	50	28.5	20.5	170
34	FPADS34B	25	34.5	26.6	180
42	FPADS42B	25	42.5	32	200
54	FPADS54B	25	54.5	43	240

**Compliance, Approvals & Accreditation;**



EN 61386 Classification Available on request

**Typical Applications;**



Construction



Machinery and OEM's

Errors, omissions and amendments excepted. As part of continuing product development Flexicon Ltd reserve the right to alter product specifications without prior notice. Data given is correct at time of compilation. Product specification and application data is for guidance only and does not constitute a warranty of any kind, either expressed or implied for Flexicon products or their suitability for a specific purpose. Third party approvals maybe limited to certain sizes within a product range.

Created by: <b>Colin Legg - Marketing Manager</b>	Approved by: <b>Ian Gibson - Technical Director</b>	Date: <b>November 2011</b>	Page Number: <b>Page 1 of 1</b>
--	--	-------------------------------	------------------------------------