


NEW

FILLING NOZZLE

STERILISABLE BY GAMMA IRRADIATION OR AUTOCLAVING

- Available in 7 different inner diameters from 0.6mm to 0.8mm
- Length allows for bottom-up filling applications
- Surface finish at tip of nozzle prevents dripping
- Meets FDA and USP Class VI requirements
- Supplied in Tyvek pouch ready for autoclaving or gamma irradiation
- Packed in ISO Class 8 clean room
- Full material traceability
- Batch specific quality certificate included
- Designed for fast change-over
- Fits standard nozzle holders on Flexicon Liquid Filling machines

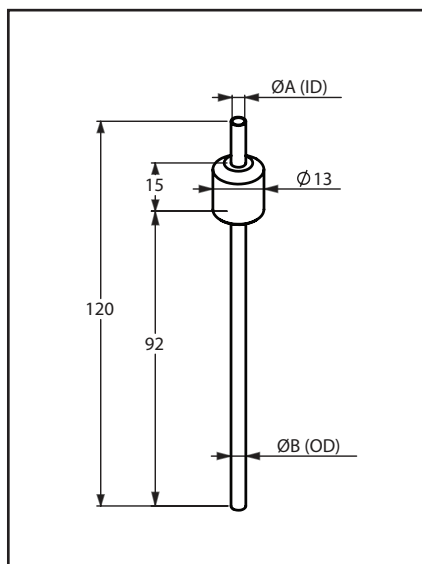

| SPECIFICATIONS | | | | |
|---|---|-------|-------------------|-------------|
| Materials | AISI 316L and PEEK | | | |
| | A (ID) | B(OD) | Fill volumes from | Part number |
| Dimensions in mm | Ø0,6 | Ø1,0 | 0.1 ml | 30-040-006 |
| | Ø1,0 | Ø1,5 | 0.5 ml | 30-040-010 |
| | Ø1,6 | Ø2,1 | 1.7 ml | 30-040-016 |
| | Ø3,2 | Ø3,8 | 6.5 ml | 30-040-032 |
| | Ø4,5 | Ø5,5 | 12.0 ml | 30-040-045 |
| | Ø6,0 | Ø7,0 | 22.0 ml | 30-040-060 |
| | Ø8,0 | Ø9,0 | 35.0 ml | 30-040-080 |
| Nozzle holder incl. arm for filling stand | | | | 30-700-053 |
| Compliance | FDA USP, class VI FDA 21 CFR Part 177.2415, 2008 BSE/TSE free | | | |
| Quality certificate | Included | | | |

